



73" AJ Laser 230z Assembly Instructions

Congratulations

Whether you're looking to go out and go 3d huckin' or lay down a smooth-as-butter precision flight, the 73" Laser 230z is for you! The wings have been thoroughly refined to allow precision flying, while not sacrificing any 3d characteristics. With a generous fuselage height, the model flies as well on its side as it does upright. Generously sized control surfaces give you excellent authority at all speeds. The Laser 230z features an awesomely light but strong airframe and a light wing loading that will handle anything you want it to.

Building the airplane is very straight forward. The rudder cables are pre-installed, hinges are pre-installed and blind nuts in the wing tips for the included SFG's make it easy to get this bird in the air in no time flat. Transporting this big bird is no problem with the now included removable rudder. We've also added an additional hard-point in the rudder for push-pull setups.

Can't decide which power system to add to your 73" Laser? The electric setup gives the ability to strap batteries (8-12s) in and just go fly. You can expect around 6-7 minute flight times with great power and ultra-reliability. Love the smell of burning gas in the morning? We've successfully tested the laser 230z with the DA-35 and the Valley View 40cc twin. With a 16oz Fortitude tank you will see flight times approaching 15 minutes! When using the Valley View twin, it is recommended to add a second elevator servo for balance. AJs' personal pick for this 73" Laser 230z is the 8s electric setup, ultra-floaty and a great flight envelope. Whichever you choose, we're sure it'll put a smile on your face every time you fly it!

Up Your Game! Fly AJ Aircraft

AJ Aircraft thanks you for the purchase of this airplane. Top grade materials and precision assembly has gone into this to make this a top quality aircraft. Following the directions closely, will assure you many hours of thrilling flight. Two years of design, development and testing has gone into this airframe. We hope you're as happy with it as we are!



WARNING!

AJ Aircraft’s extensive testing ensures a high quality kit that has gone through many stages to provide you with a safe, reliable, airframe. Poor assembly will lead to an unsafe model and therefore the instructions must be followed closely. Should you have any questions, please do not hesitate to contact us. The safe operation of this model is your responsibility and yours alone. If you are a beginner or have never flown a model of this size and power you should attempt it with the help of an experienced pilot. This product should not be considered a toy, but rather a sophisticated, working model that functions much like a full-scale airplane. Because of its performance capabilities, this product, if not assembled and operated correctly, could cause injury to you or spectators and damage to property.



This aircraft should be flown in accordance to the [AMA safety code](#). It is highly recommended that you join the Academy of Model Aeronautics in order to be properly insured and to operate your model at AMA sanctioned flying fields. If you are not willing to accept all liability for the use of this product please return it to the place of purchase immediately.

AJ Aircraft does not accept responsibility or liability for damages resulting from use of this product.

Contents

Congratulations.....	1
Features	3
Optional Configurations.....	4
Recommended Items for Completion.....	4
Tools.....	5
Covering	6
Wings	6
Landing Gear	11
Wheel Pants	12
Fuselage	14
Elevator	16
Rudder.....	21
Push-Pull Rudder Control.....	21
Pull-Pull Rudder Control.....	22
Electric Motor	25
Gas Engine.....	27
Cowl & Canopy.....	30
Radio Installation & Setup	32



Before starting, read through the entire set of instructions to familiarize yourself with the process.

If there's ever a question, contact AJ Aircraft. 734-244-4015



Additional assembly information can be found in assembly videos on the [AJ-Aircraft YouTube Channel](#)

Inspect the packing material carefully for the rudder hinge pin.



Features

Specs:

- Wing Span - 73"
- Length - 70"
- AUW - 10-11 lb
- Power(Elec) - 2500+ Watt motor, 120Amp or 100Amp ESC, 8s 4400mah LiPo
- Power(Gas) - 30-40cc
- Radio - 5 channel with 4 high torque servos


What's in the box:

- 73" Laser 230 Airframe
- Fiberglass Cowl & Wheel Pants
- Carbon Fiber Main Gear
- Pre-Hinged Control Surfaces
- Removable Rudder
- G-10 Control Horns
- Dual Ball Links for all Connections
- Carbon Fiber Wing Tube
- Optional Side Force Generators (SFG)
- Genuine Ultracote Covering
- Wing Bags
- Muffler Canister Mounts



Optional Configurations

This model is designed for a gasoline engine or an electric motor. Fastener, servo hardware, and electric motor box are provided for optional setups. You also have the option of using 1 or 2 elevator servos and a pull-pull rudder servo or 1 elevator servo and a push-pull rudder servo setup.

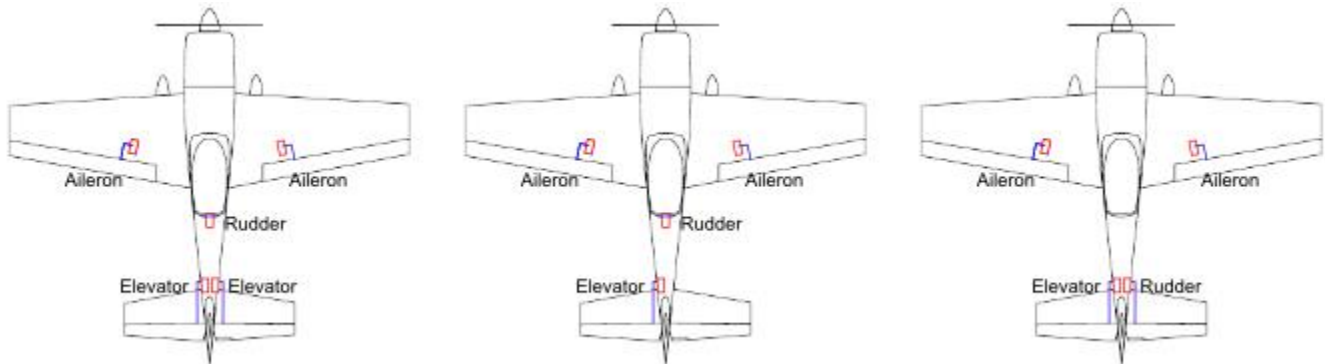

Recommended Items for Completion

- Power System
 - Electric Motor (If you choose to go electric.)
 - Hacker A60-5S or Equivalent
 - Castle Ice 100 Amp or Equivalent
 - 12" ESC (Servo) Wire Extensions
 - 8s Battery
 - Prop suited for the motor you choose. (21x10, ...)
 - 3" (76mm) Spinner
 - Gas Engine (If you choose to go gasoline.)
 - DA-35 or Equivalent 35cc
 - Standard sized metal geared throttle servo.
 - Ignition Shut Off
 - Ignition/Receiver Battery
 - 16 oz Gasoline Safe Fuel Tank
 - Gasoline Safe Fuel Line
 - Fuel Dot
 - Fuel Filter
 - 2x 12" Servo Wire Extensions
 - Prop suited for the engine you choose. (20x8, 20x9...)
 - 3" (76mm) Spinner
- Aileron Servos
 - 2x 250 oz/in Metal Geared, (Hitec HS-7955TG Recommended)
 - 2x 12" Servo Wire Extensions (in wings)
 - 2x 6" Servo Wire Extensions (to receiver)
 - 2x 1.25" Servo Arm for 3D Aerobatics (Or a heavy duty servo arms for sport flying.)

AJ flies this airframe with the following equipment:

Hacker A60-5s
Falcon 21x10 prop
Jetti Mezon 120 or
Castle Ice 100 ESC
2x Thunder Power 4s 4400mah
G8 Performance Pro 45C
Castle Pro BEC
Thunder Power 2s 2100mah G8
Pro-lite + 25C
Futaba 9157 servos on
Elevator/Rudder
Futaba 9452 servos on Ailerons

- Rudder Servo
 - This model can be configured with a pull-pull cable rudder servo or using a push-pull servo mounted in the tail.
 - 1x 250 oz/in Metal Geared, (Hitec HS-7955TG Recommended)
 - 2.5" Double Servo Arm for a Pull-Pull cable setup.
 - 1.5" Servo Arm for a Push-Pull setup. (Or a heavy duty servo arms for sport flying.)
 - 24" Servo Wire Extension for a Push-Pull setup.
- Elevator Servo
 - This model can be configured with 1 or 2 elevator servos.
(You must use a pull-pull rudder setup if you plan to use 2 elevator servos.)
 - 250 oz/in Metal Geared, (Hitec HS-7955TG Recommended)
 - 1.5" Servo Arm for 3D Aerobatics (Or a heavy duty servo arms for sport flying.)
 - 24" servo wire extensions (1 or 2)
- Radio System
 - 5 or 6 channel full range radio system
 - Power Switch
 - Receiver Battery
 - Vibration padding for receiver and receiver battery.

Tools

Blue Painters Masking Tape	Small Flat File
Thin CA Glue	Small Round File
30 Minute Epoxy	Electric Drill w/ Assorted Small Bits
Polyurethane Glue (Gorilla Glue)	Small Flat Blade Screwdrivers
Denatured Alcohol	Small Phillips Screwdriver
Paper Towels	Sandpaper (150-220 Grit)
Removable Thread Locker (Loctite 242, Blue)	Needle Nose Pliers
Metric & SAE (fractional) Allen Wrenches	Crimping Pliers
Hobby Knife & Fresh Blades	Measuring Tape & Ruler
Covering Iron (Trim Iron)	



Covering

The covering on your Laser may have developed loose areas through temperature and humidity changes between manufacturing and shipping. This may also occur during the summer heat. The covering may require retightening a few times during your first summer of flying.

Take a few minutes to go over all of the seams making sure all edges are secure. Then proceed to shrinking any area that may need tightening. (Using an iron sock will reduce scratches.)



At 200-220°F (93-104°C) the adhesive on UltraCote® becomes active allowing the covering to be attached to the model. While 220° will fully bond the covering to the model it is well below the temperature that causes UltraCote® to shrink.

At 300°F (149°C) the initial shrinking of UltraCote® begins.

At 350°F (176°C) UltraCote® reaches its maximum shrinking point. Raising the temperature above this point will not cause further shrinkage.

Use as little heat as needed. Using too much heat may cause reshinking issues later.

Wings

The ailerons are pre hinged and glued to the wing. Firmly tug at each hinge point to ensure hinges are installed properly. It's better to find a loose hinge now rather than during a flight.

Carefully locate the aileron servo pocket. (Shining a light through opposite side of the wing will help highlight the pocket location.) Use a new hobby knife blade to cut through the covering. Cut from the corners of the pocket towards the center of the pocket so the covering can be folded in.



Gently snap off the servo wire installation string and temporarily secure it out of the way. Do not pull it out of the wing.


Use a trim iron to seal the bottom surface of the wing around the servo pocket. Fold the cut covering under the wing sheeting and attach it to the inside edge of the pocket.



Carefully locate the aileron control horn slots. Use a covering sealing iron to bond the covering in the area the control horn will sit. Trim the covering away to expose the slots. Be careful you don't cut through to the top side covering.



Use the control horns from the "Wings" part bag.

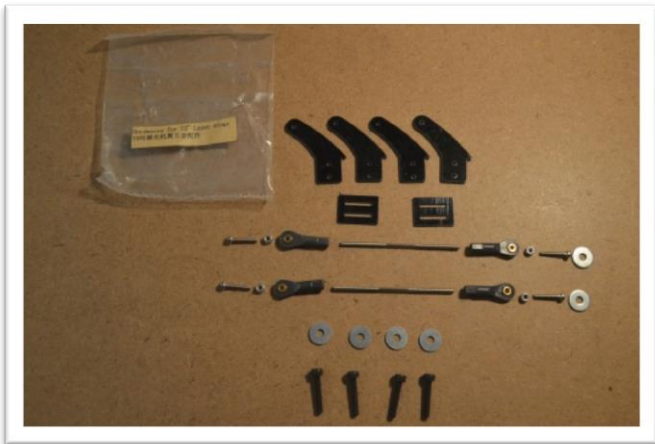


Test fit the control horn halves in the slot first individually, then as an assembly. The fit should be snug.




Check the alignment of the control horn to the hinge center line. The linkage hole in the control horn should be aligned with the hinge centerline.




With the control horn in position apply painter's masking tape around the control horn base. Put the tape up to the base edge. Not under or over it.

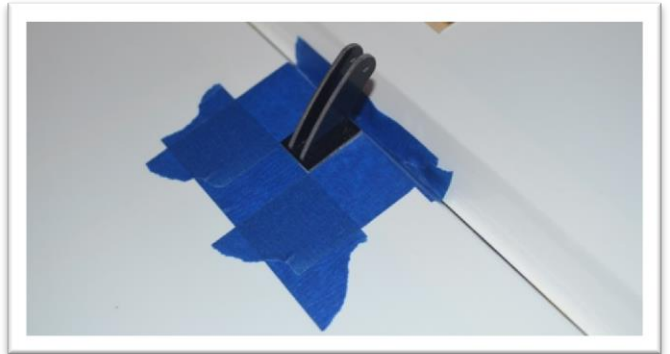

Assemble a rod end to the control horn using a supplied machine screw and nylon lock nut. Assembling the ball link to the control horn at this step will help keep the control horn halves parallel during installation later.

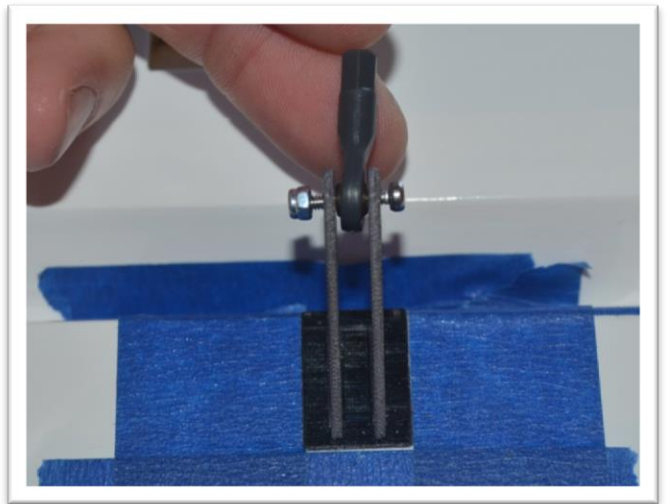


Remove the control horn leaving the tape in position. Using a new hobby knife blade and lightly cut through the covering but not into the balsa sheeting. Cut inside the tape edge about 1/16".

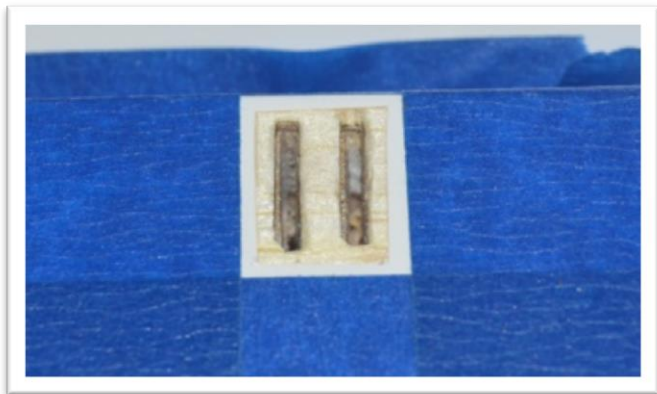


Use sand paper to roughen the lower portion of the control horns on both sides. Roughen one side of the base plate. This will help the epoxy bond to the control horn parts.




Apply epoxy to the slots in the aileron. Use a pin to help push some epoxy in.

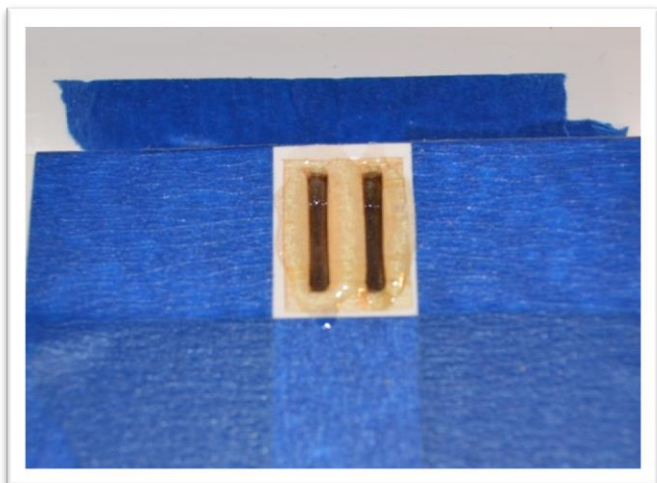


Apply epoxy to the control horn assembly and insert it into the aileron slots.

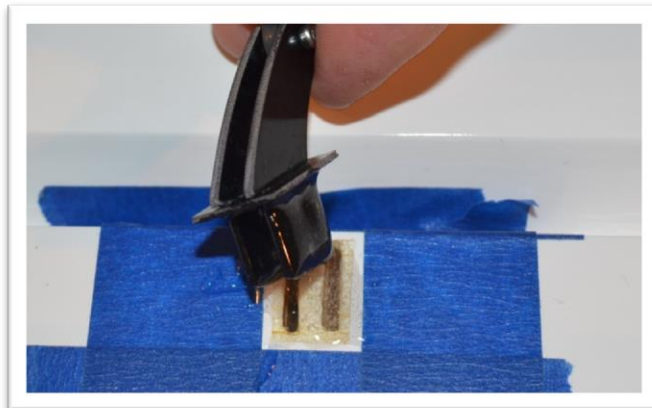

Wipe away excess epoxy using a paper towel soaked with denatured alcohol. Use an upward rolling motion as you wipe the excess epoxy to lift it from the surface. This helps reduce smearing the epoxy.

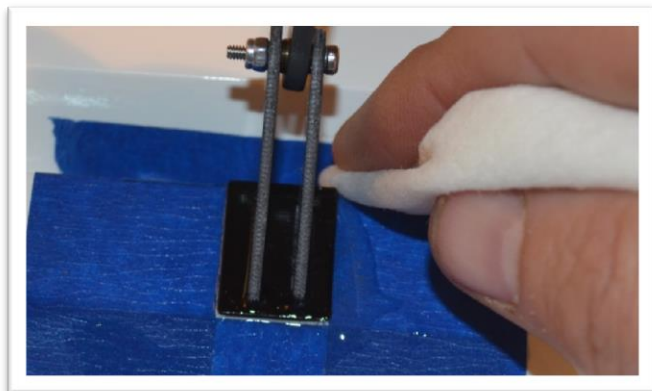

Check the alignment along the hinge line as you did when you test fit the control horn. Reposition as needed.

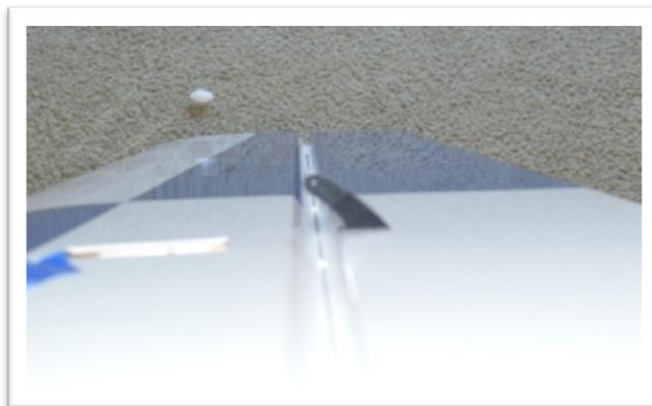

Allow the epoxy to partially cure. Peel away the masking tape after the epoxy is securely holding the control horn in place and still soft enough to easily remove the tape. Set the wing aside and let the epoxy fully cure.

Connect the servo to a receiver and power supply. Turn on your transmitter. Set trim and sub trim to zero. Install a servo arm on the servo approximately perpendicular to the servo side. Use the transmitter's sub trim to make it perpendicular.



Attach the servo wire to the installation string and gently pull the wire through the wing as you insert the servo into the wing. (Depending on the length of the servo wire provided it may be necessary to install a servo extension wire before installing through the wing.)




Secure wire extensions to servo leads using shrink wrap or a safety clip.



Pre-drill for the servo mounting screws using a 1/16" drill bit. Install the servo with the wood screws that came with your servos. Remove the screws and servo. Apply a drop of thin CA glue into each mounting screw hole. This will harden the wood around the screws and provide a more secure installation. (Allow the CA glue to dry before reinstalling the servo.)



Reinstall the servo. Assemble a connecting rod and ball link and to aileron ball link. Check the length of the assembly to the servo arm with the aileron edge aligned with the wing. Once the correct length of the assembly is found connect it to the servo arm using the provided machine screws washer and lock nut. (Turn on the transmitter, receiver and servo while making adjusting to the connecting rod. This will keep the servo in its correct position.)

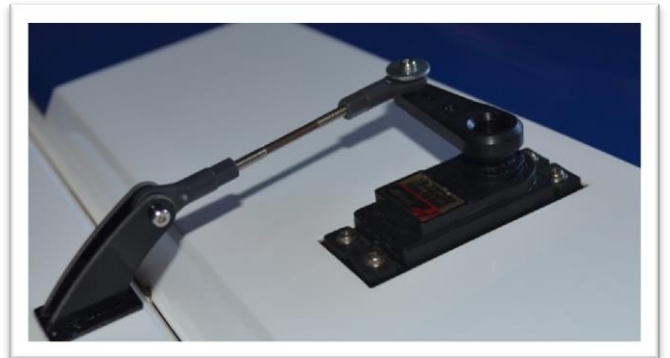


Remove the side force generators and spacer plates from the wing bag. Carefully locate the 2 mounting holes in each part and trim away the covering.




The wing tips have a blind nut installed beneath the covering. Use a hobby knife to trim away the covering. (Use the holes in a spacer plate to help locate the holes in the wing tip.) Assemble the spacer plate and the side force generator to the wing with the supplied screws and washers.



Landing Gear

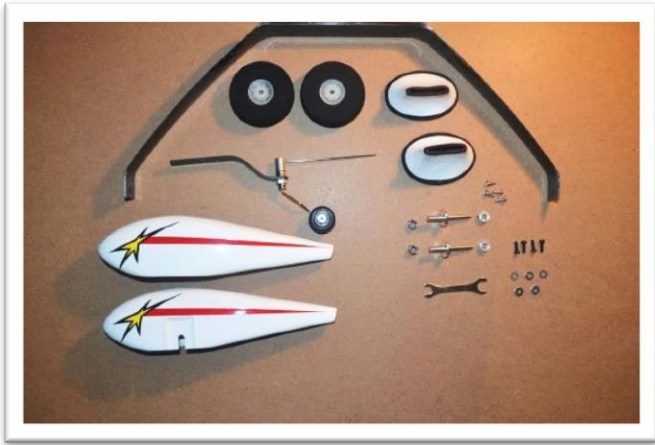


Use the landing gear fasteners located on the bottom of the fuselage along with 3 flat washers located in the landing gear package to assemble the landing gear. Add a drop of removable thread locker to the screws during assembly.




Place the wood filler block over the landing gear. Pay attention to the fit as it is directional. We suggest using a piece of white covering or clear packing tape to hold the filler block in position.



Install the landing gear cuffs with the holes towards the bottom of the airplane. Use a flat blade screw driver with a gentle twist to help slide the cuff over the landing gear.

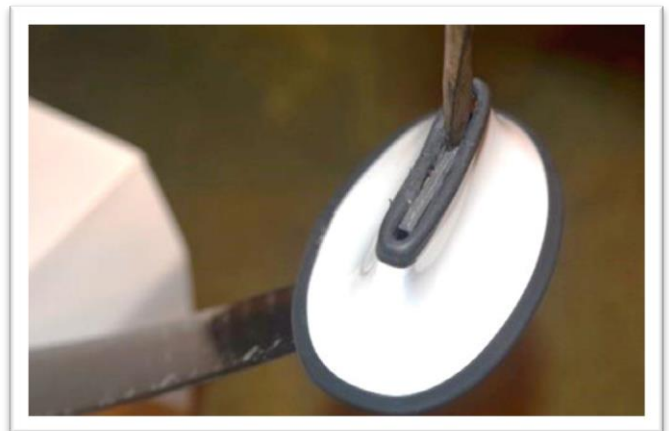

Secure the cuffs using 4 Phillips head screws from the landing gear hardware package. You may also choose to use a silicon adhesive (RTV) to secure the cuffs in position. Apply a bead of adhesive just above the mounting holes and slide the cuff over the adhesive.

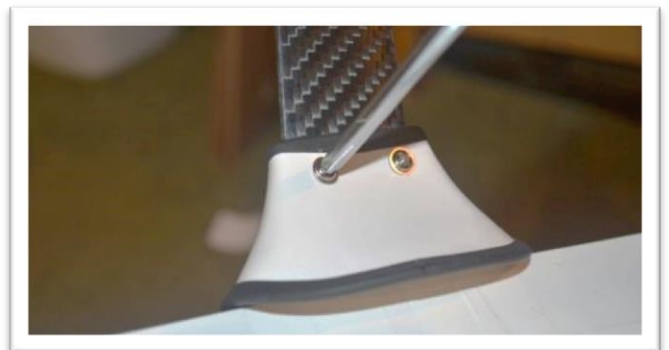




Ensure all set screws are tight on the pre-assembled tail wheel assembly.



Use the landing gear fasteners locate on the bottom of the fuselage along with 2 flat washers located in the landing gear package to mount the carbon fiber landing gear. Add a drop to removable thread locker to screws during assembly.

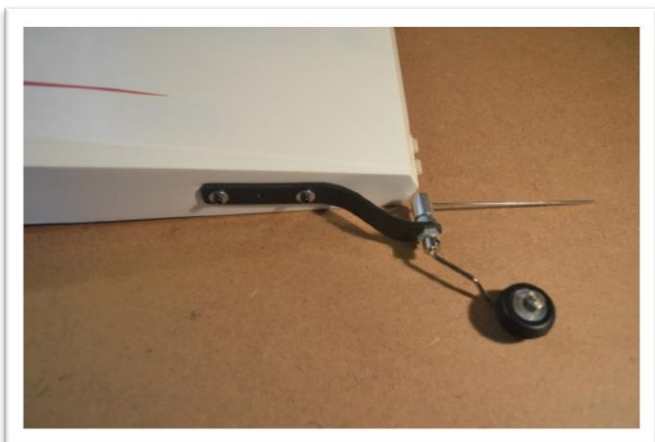

Wheel Pants

(You might want to install the wheels and wheel pants last when assembling you airplane. They may get in the way while handling during other assembly steps.)

There are 6 blind nuts provided and 6 blind nuts used in this kit. Notice that there are 2 different sizes! Take the time to match up blind nuts to machine screws before proceeding to ensure you do not get them mixed up. Two blind nuts will be used on the canopy and 4 blind nuts will be used on the wheel pants.



File a flat on the wheel axel for the wheel collar set screw. (Making it perpendicular to the wrench flats may help during installation and tightening later.)



Temporarily clamp the wheel pants in position.



Drill through the holes in the landing gear and through to the inside of the wheel pant.



Use a machine screw and washer to draw a blind nut into the wheel pant.



Slide the wheel onto the axel. Add the wheel collar and tighten the set screw. Ensure it rotates freely. Put the wheel and axel into the wheel pant then put the axel threads through the landing gear.

Get the wheel pant mounting screws started but don't fully tighten.



Add the nylon locknut to the axel and tighten. Make sure you can still get to the wheel collar set screw.

Finish by tightening the wheel pant mounting screws.



Fuselage


Inspect for any interior joints that may have loosened as a result of shipping & handling. Apply thin CA glue as needed. Apply thin CA glue around the joints of the fuselage core and rudder servo tray.

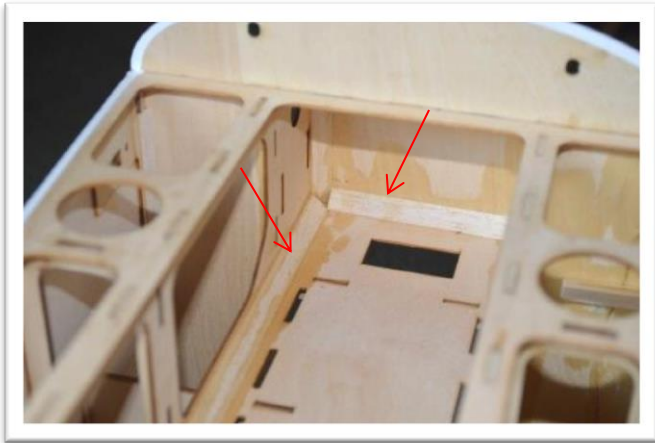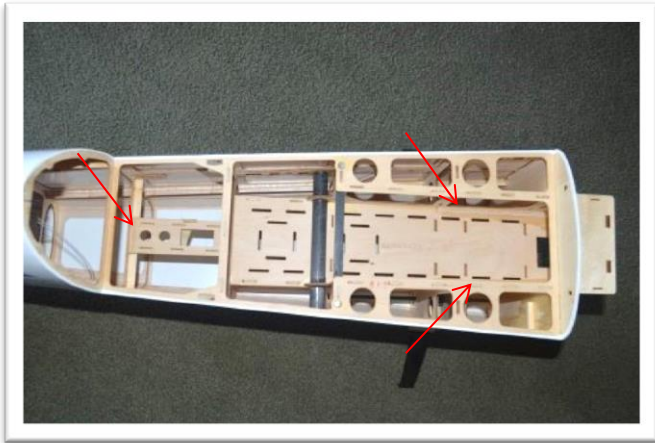


Carefully locate the mounting holes for the wing and trim away the covering. There will be 2 holes for wing alignment pins, 1 hole for the wing bolt, and a slot to pass the servo wire through. Shine a flashlight through the fuselage to highlight the holes if you have trouble locating them.




Carefully locate the horizontal stabilizer pocket. Use a trim iron to seal the covering around the edges of the pocket before trimming. Use a new hobby knife blade to cut through the covering.

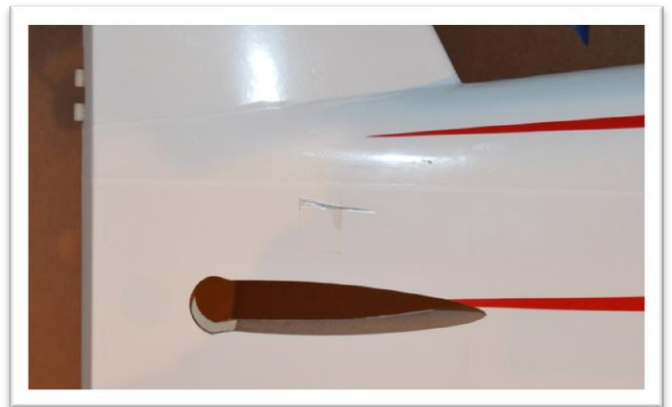

Review the servo configurations as described on page 4 before cutting the covering over the servo pockets. Below the horizontal stabilizer slot there are 2 servo pockets on both sides of the fuselage. The lower servo pocket highlighted by blue painter's tape will not be used. The servo pocket which has the covering cut will be filled by an elevator servo. Use a sealing iron to attach the covering and fold it into the pocket.

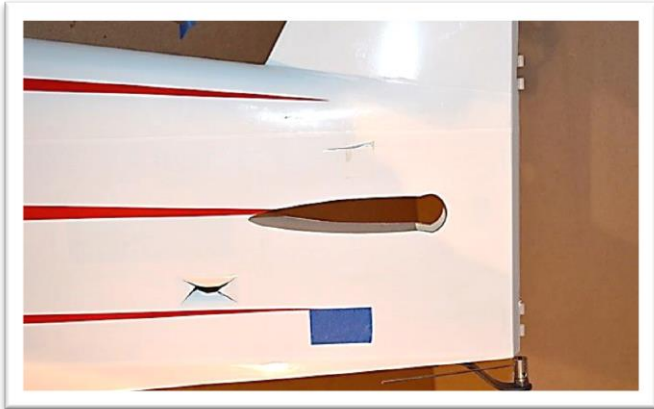


The servo pockets on the opposite side are both optional. The lower servo pocket closer to the tail of the airplane will be used if a rudder push-pull configuration is used. The other servo pocket will be used if a second elevator servo is used.

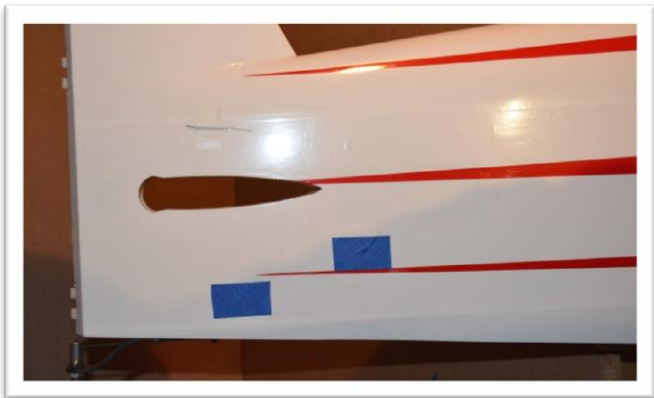

Slide the horizontal stabilizer through the fuselage pushing it all the way forward. Center it side to side using a tape measure.



Install and center the main wing tube. Look at the plane from the back forward to make sure that the horizontal stabilizer is parallel with the wing tube. Notice that the horizontal stabilizer is tapered which may obscure the actual alignment. If the stabilizer is not aligned use shims or sand inside the pocket until it's parallel.

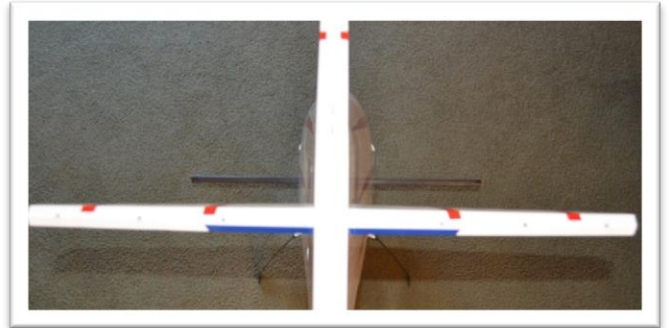

Push the horizontal stabilizer all the way forward in the pocket. Position the stabilizer parallel to the main wing tube. Adjust the stabilizer until the measurements to the wing tube are equal on both sides. Continue checking the stabilizer to ensure it is still centered as described above. Extra time spent here will go a long way to improve the flight characteristics of your airplane.



Once the horizontal stabilizer is positioned glue it in place with thin CA glue. Wick glue in on both sides, top and bottom. The use of an applicator tip is suggested to control the flow of thin CA and get it exactly where you want it.



Elevator

The hardware provided may be used to control elevator halves with 1 or 2 servos. Or the hardware can be used with 1 elevator servo and 1 rudder servo in a push-pull configuration.



Before you cut any covering on the elevator make sure you have the correct half. If you cut open the servo pocket in the left of the fuselage make sure you are working with the left elevator.

Install the elevator control horn using the same process as you did when assembling the ailerons.

Use a covering sealing iron to bond the covering in the area the control horn will sit. Trim the covering away to expose the slots.




Test fit the control horn halves in the slot individually, then as an assembly. The fit should be snug. Check the alignment of the control horn to the hinge center line as you did with the wing. The linkage hole in the control horn should be aligned with the hinge centerline.




With the control horn in position apply painter's masking tape around the control horn base. Put the tape up to the base edge. Not under or over it.


Assemble a rod end to the control horn using a supplied machine screw and nylon lock nut. (Assembling the ball link to the control horn at this step will help keep the control horn halves parallel during installation.)

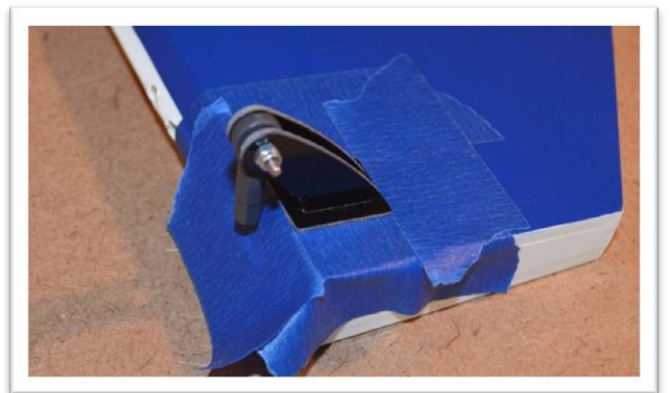


Remove the control horn leaving the tape in position. Using a new hobby knife blade lightly cut through the covering but not into the balsa sheeting. Cut inside the tape edge about 1/16".

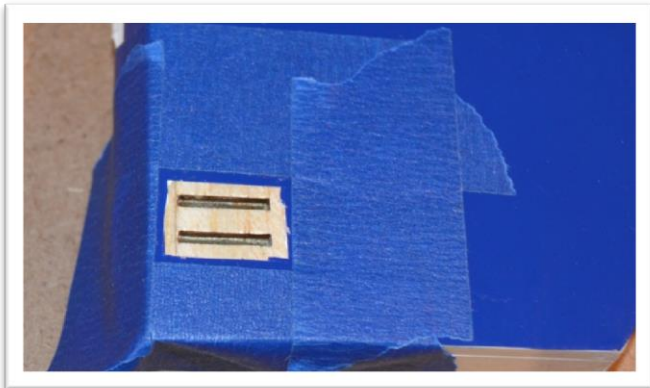


Use sand paper to roughen the lower portion of the control horns on both sides. Roughen one side of the base plate. This will help the epoxy bond to the control horn parts.

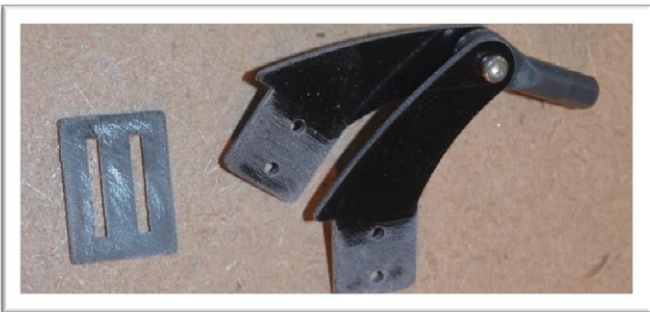

Apply epoxy to the slots in the elevator. Use a pin to help push some epoxy into the slots. Apply epoxy to the control horn assembly and insert it into the elevator slots.

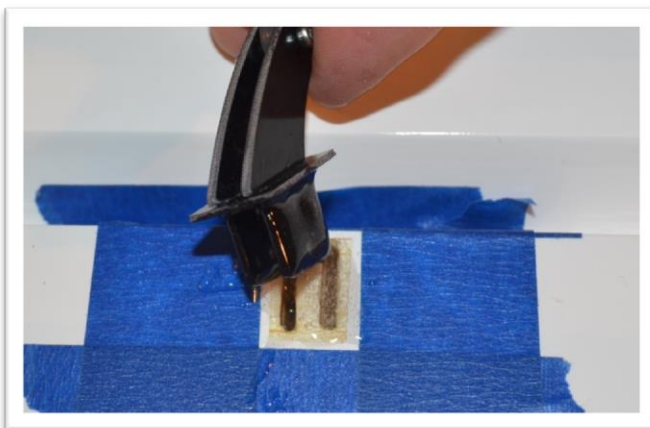

Wipe away excess epoxy using a paper towel soaked with denatured alcohol. Use an upward rolling motion as you wipe the excess epoxy to lift it from the surface. This helps reduce smearing the epoxy.

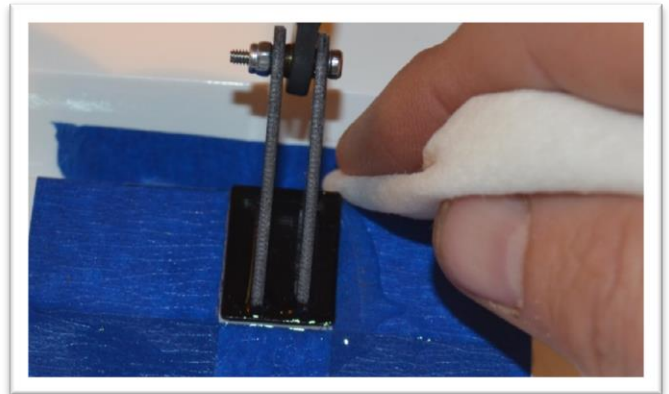

Check the alignment along the hinge line as you did when you test fit the control horn. Reposition as needed. Allow the epoxy to partially cure. Peel away the masking tape after the epoxy is securely holding the control horn in place and still soft enough to easily remove the tape. Set aside and let the epoxy fully cure. (Repeat on second elevator half if you will be using 2 elevator servos.)

Roughen up the jointer plate for the elevator halves with a piece of sand paper so the epoxy will adhere better. (The jointer plate is not used if you plan to use 2 elevator servos. Steps related to the jointer plate can be skipped)





Test fit the elevator jointer plate to each elevator half. Insert the jointer plate into both halves and look down the hinge line. It should be straight. If not use a small file and adjust the slots a little at a time. (Do not glue it yet.)



Insert hinge pins into the elevator halves and the horizontal stabilizer. Check the fit and gap at the hinge line. You may need to adjust the hinge holes to minimize the gap.



A small round file can be used to give the hinges some clearance. Cleaning out the holes will also help you close up any gap. Turn a 1/8" drill into the holes by hand.




Test fit pieces together and make adjustments so you get a good fit between the elevator and the stabilizer. Check the hinge gap and the gap at the counter balance. Make sure there is clearance between the elevator joiner plate and the fuselage. Hold half of the elevator aligned to the leading edge of the stabilizer and ensure the opposite elevator half is also aligned. Sand or shim the elevator joiner plate until both halves are aligned to at the leading edge of the stabilizer.




Practice assembling the elevator, hinges and joiner plate together without glue so things go smoothly when you glue it all together.



Apply petroleum jelly (Vaseline) to the center hinge pin portion of each hinge. This will help prevent glue from getting into the hinge when gluing then into the elevator. Avoid getting petroleum jelly on the barbed portion of the pin. If you do clean it off with alcohol.

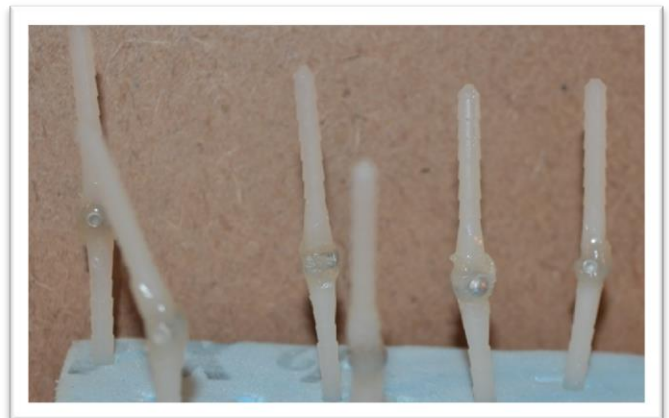

Use painter masking tape to prevent glue from getting where you don't want it.

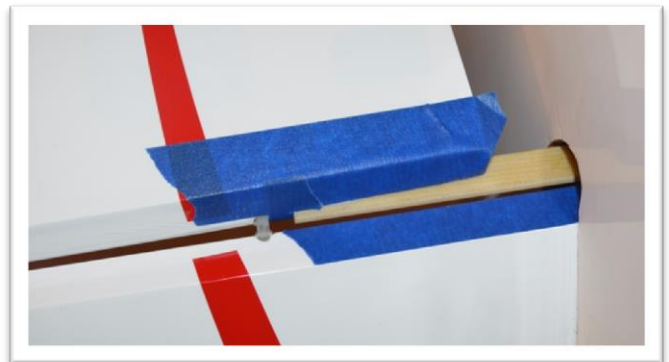

We suggest using 30 minute epoxy for the elevator jointer plate and polyurethane glue for the hinges. (Add a drop of water to each hinge hole if using polyurethane glue like *Gorilla Glue*. This type of glue activates with moisture.)


- Begin the final assembly of the elevator by adding glue to the horizontal stabilizer hinge holes then insert hinges. (If using *Gorilla Glue* it will only take a few drops per hinge. Use a pin to push the glue into the hole.)
- Add epoxy to the joiner slot and glue to the hinge holes of one half of the elevator then partially slide it onto the hinges.
- Insert the jointer plate through the fuselage then into the elevator half.
- Add epoxy to the joiner slot and glue to the hinge holes of the second elevator half then slide it onto the hinges and jointer plate.
- Push both elevator halves into position and wipe away any epoxy that has squeezed out.
- Watch for glue expanding around the hinges and wipe away with alcohol as needed.
- Move the elevator up and down to make sure it has full travel. It won't hurt to apply additional petroleum jelly to the hinges.
- Tightly tape the gap between the horizontal stabilizer and the elevator counter balance while the glue and epoxy dry.



You may also use wide sticks and clamps to hold the halves aligned.



Carefully remove "masking" tape before the epoxy fully sets. But do not remove the tape at the stabilizer and elevator counter balance until epoxy is fully cured.

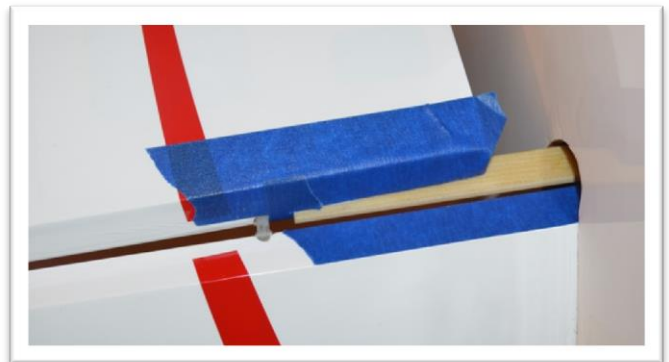

Attach a 24" servo extension onto the elevator servo lead and use shrink wrap or a safety clip to secure the connection.




Install the servo into the fuselage and pre-drill for servo mounting screws using a 1/16" drill. Install the servo with the wood screws that came with your servos. Remove the screws and servo. Apply a drop of thin CA glue into each screw hole. This will harden the wood around the screws and provide a more secure installation. (Allow the CA glue to dry before reinstalling the servo.)



Connect the elevator servo to a receiver and power supply. Turn on your transmitter. Set trim and sub trim to zero. Install a servo arm on the servo approximately perpendicular to the servo side. Use the transmitter's sub trim to make it perpendicular.



Reinstall the servo. Assemble a connecting rod and ball link and to elevator ball link. Check the length of the assembly to the servo arm with the elevator aligned with the stabilizer at the leading edge. Once the correct length of the assembly is found connect it to the servo arm using the provided machine screws washer and lock nut. (Turn on the transmitter, receiver and servo while making adjusting to the connecting rod. This will keep the servo in its correct position.)

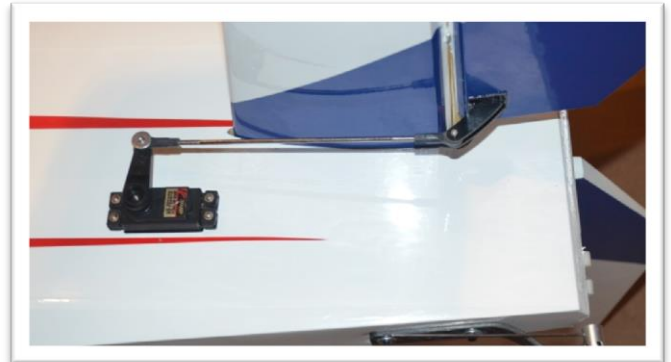

Rudder


The rudder control can be configured as a push-pull system or as a pull-pull cable system. See the configuration options listed on page 4.

Inspect the packing material carefully for the rudder hinge pin. It is typically taped to the inside of the box.




Push-Pull Rudder Control

A push-pull system will use the hardware provided in the elevator parts bag.

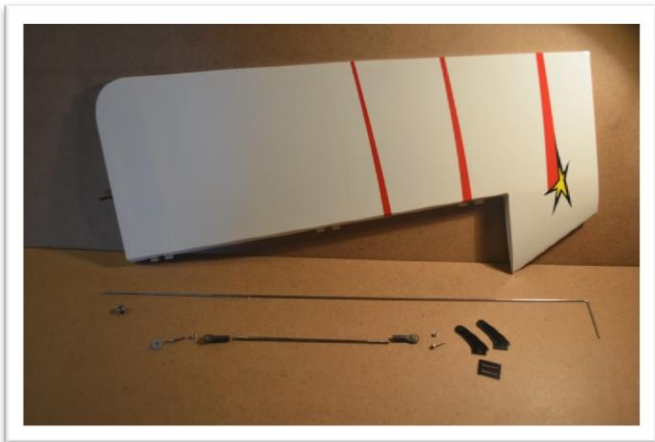

Notice that the control horns for the push-pull system shown at the top of this picture are longer than the pull-pull control horns.

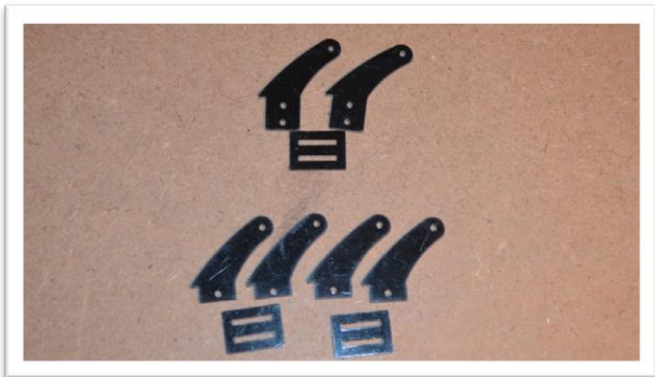

The rudder is built with control horn slots for the push-pull control system and the pull-pull control system. The blue painter's tape indicates the control horn locations. The push-pull control horn slots are located near the bottom of the rudder.



The picture below shows a mockup of the rudder push-pull system. The installation process of the servo and control horn is the same as the ailerons and the elevator.



The pull-pull cables can be removed and the covering will need to be patched with covering or a smartly placed decal.



Pull-Pull Rudder Control

A pull-pull system will use the hardware provided in the rudder parts bag.



The rudder is built with control horn slots for the push-pull control system and the pull-pull control system. The blue painter's tapes indicate the control horn locations. The pull-pull control horn slots are located higher up on the rudder.




Cut the rudder covering to expose the control horn slots on both sides of the rudder as you did for the ailerons and elevator. Test fit the control horns, mask off the area surrounding the control horns and use a fresh knife blade and cut the covering as you did with the ailerons and elevator.



Use sand paper to roughen up the control horns so the epoxy will adhere better. Assemble the control horns with a ball link and brass cable eye. Thread the cable eyes about half way into the ball link.




Test fit the control horns to the slots and align with the hinge line. The control horns should be symmetrical about the hinge line.

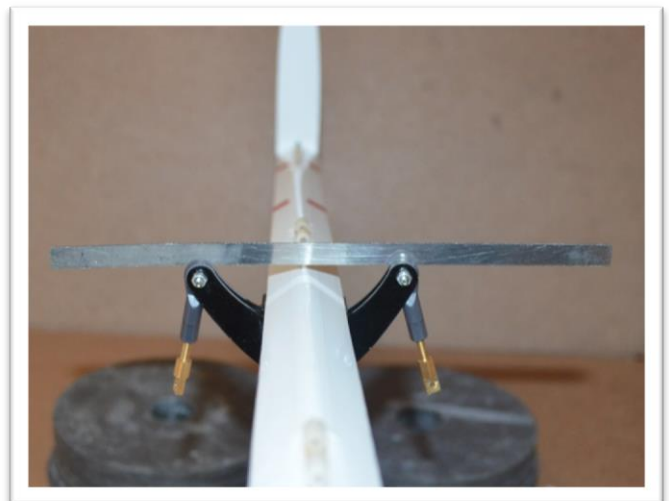

Use 30 minute epoxy to glue the control horns in place. Check the alignment, peel the masking tape away and set aside for the epoxy to cure.

Slide the tail wheel guide through the ball link eye which is pre-installed at the bottom of the rudder. Align the rudder hinges to the vertical stabilizer hinges. Insert the rudder hinge pin through the top of the rudder then through each of the hinges. You may need to trim the length of the hinge pin if it interferes with the tail wheel assembly.

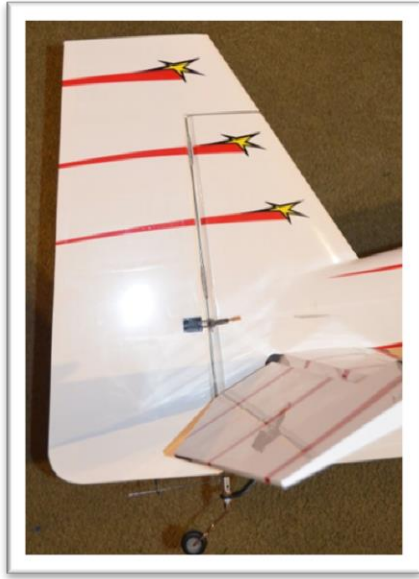


Install the rudder servo into the fuselage and pre-drill for servo mounting screws using a 1/16" drill. Install the servo with the wood screws that came with your servos. Remove the screws and servo and apply a drop of thin CA glue into each mounting screw hole. This will harden the wood around the screws and provide a more secure installation. (Allow the CA glue to dry before reinstalling the servo.)




Connect the rudder servo to a receiver and power supply. Turn on your transmitter. Set trim and sub trim to zero. Install a servo arm on the servo approximately perpendicular to the servo side. Use the transmitter's sub trim to make it perpendicular to the side of the servo.

Tread the brass cable eyes about half way into the ball links.

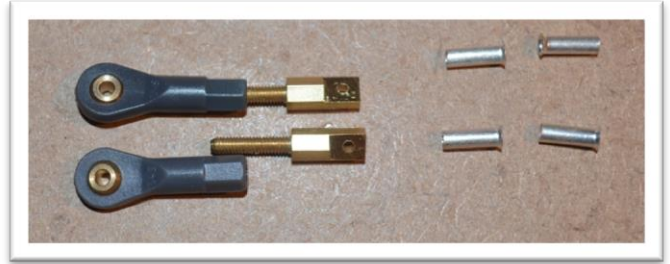

Start the cable assembly at the servo end inside the fuselage. Thread on 2 crush sleeves and the brass cable eye. (If wish to add shrink wrap over the connection, thread it on first.)

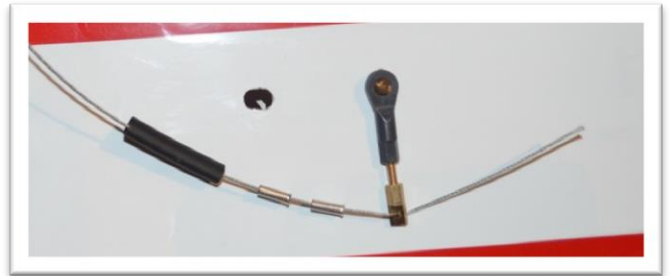

Loop around the cable eye and go back through a crush sleeve.




Loop around and back through the crush sleeve again.



Adjust the loops and crimp the sleeve with crimping pliers or the non-serrated surface of standard pliers. Slide the tail through the second crush sleeve and crimp.



Pull the slack out of the cables and make sure the cables cross once inside the fuselage. Connect the ball links to the rudder control horn.

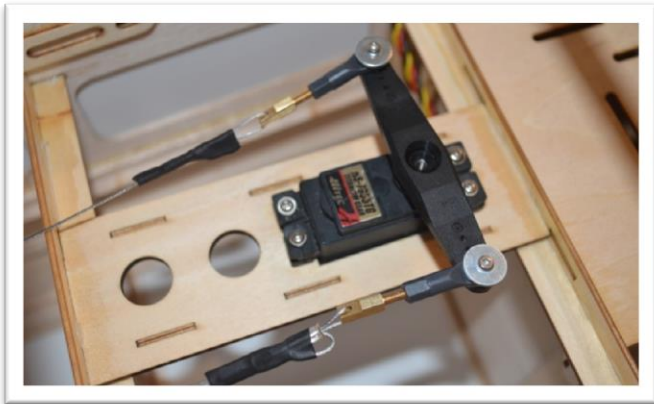

Tape the rudder in position aligned to the vertical stabilizer. With the servo powered up and centered repeat the crimping process on the rudder end of the cable. Before you crimp the crush sleeves make sure the cable is not looped around the cable eye at the servo end. Pull the cable snug. You don't need to make the cable a guitar string tight.



Remove the tape and adjust the cable lengths to center the rudder by turning the cable eyes into the ball links.

Electric Motor

The firewall is marked with the centerline offset to account for the built in thrust angle.




Use the DLE30 templet to locate the mounting holes for the electrical motor mounting box. This templet uses a 54mm X 70mm hole pattern which matches the motor box.



Drill 3/16" (4.5mm) holes through the firewall. Then use a 4mm bolt and washer to draw blind nuts into the back of the firewall.




Use 4mm bolts and washers to secure the motor box to the fire wall. Apply removable thread locker to the bolts during assembly.

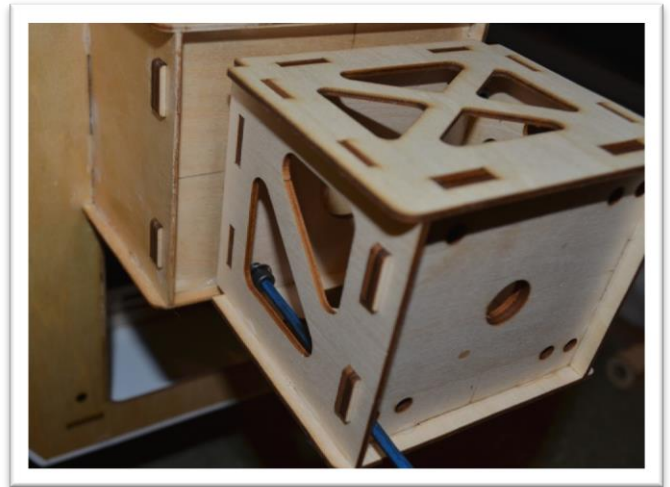


Install nylon lock nuts to the back of the firewall to prevent bolts from backing out.




Use an "X" mount with a mounting bolt circle of 75mm to mount your motor. Use the supplied 4mm bolts and washers. Add removable thread locker during installation.

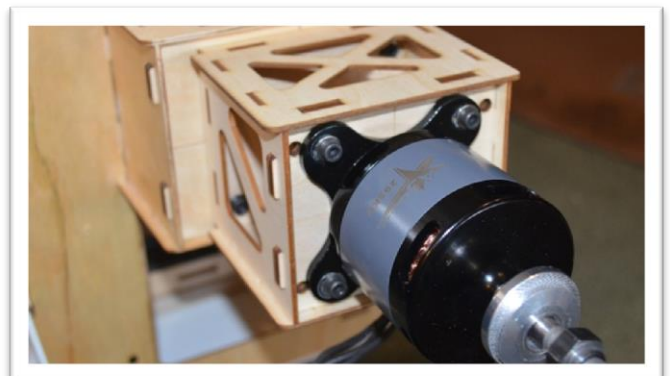

The motor's backer plate should be about 3.37" (85mm) from the motor mounting box. This will provide .12" (3mm) clearance between the cowl and the motor backer plate.

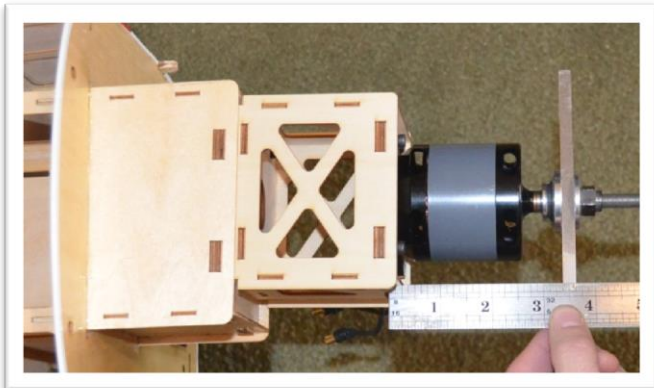

The prop backer plate will be about 6.3" (160mm) from the fuselage firewall.

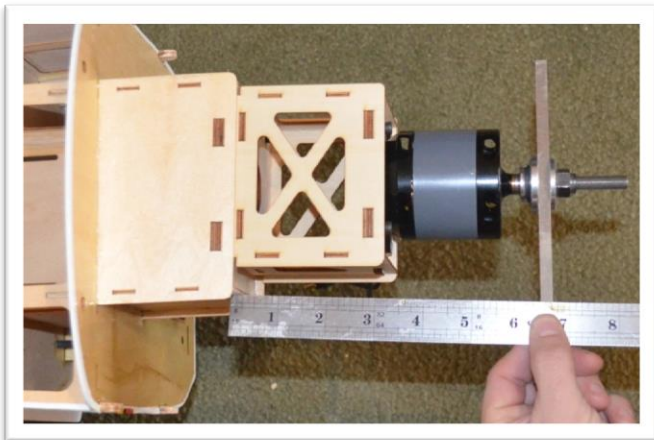


The firewall has a built in thrust angle which centers the prop shaft in the center of the cowl.



Use nylon zip ties to secure the ESC to the bottom or side of the motor box. We recommend putting a small piece of foam between the ESC and motor box to dampen vibrations.

Place hook and loop tape to the battery tray and your battery. Loop hook and loop straps around the battery. We recommend using at least a 1" strap if you intend to do high G, 3D maneuvers.

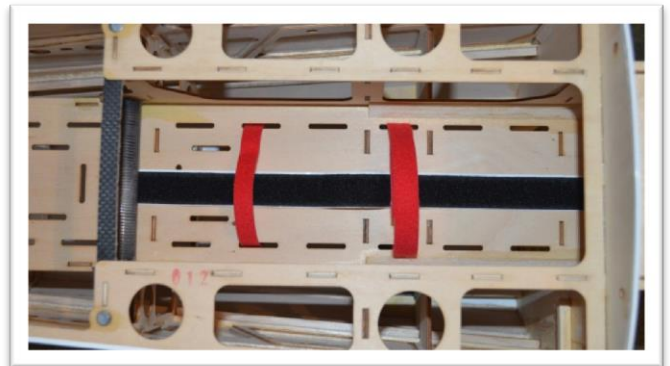

Use the balsa sheet and 2mm wood screws provided to cover the exhaust tunnel. Leaving this open may trap air and result in unwanted flight characteristics.



Gas Engine

The firewall is marked with the centerline offset to account for the built in thrust angle. This will position the prop in the center of the cowl.



Use these centerlines to position the mounting holes for the engine you decide to use. (You can use the DLE30 template if your engine uses a 54mm X 70mm hole pattern. Some engine manufactures provide templates to help locate the mounting holes, fuel line and throttle linkage. Before using these templates measure them after printing to make sure they have printed to scale.)



Drill the mounting holes then temporarily mount your engine standoff and the engine. (A DLE35RA is shown.)



Bolt the engine standoff to the firewall from the back.



The distance between the prop backer plate and the firewall should be 6.3" (160mm). This will provide space between the spinner and the cowl.



Check for clearance between the firewall and the carburetor. This distance should be noted in your engine's manual. If you don't have at least the recommended space cut an opening in the firewall so the carburetor can get air.


Mark the locations for the throttle linkage and fuel line to pass through the firewall. (It may be possible to rotate the throttle arm on the carburetor which will give you options for servo placement.) Plan the placement of the throttle servo then drill through the firewall as needed.




The placement of the throttle servo is dependent on the engine you choose to use. The servo can be mounted in the front of the fuselage in many cases. (If you choose this location drill 5 holes through the top of the engine box so servo mounting screws and the servo arm screws can be accessed.)



The servo could also be mounted to the side for the fuselage by adding a couple pieces of hard balsa or spruce.

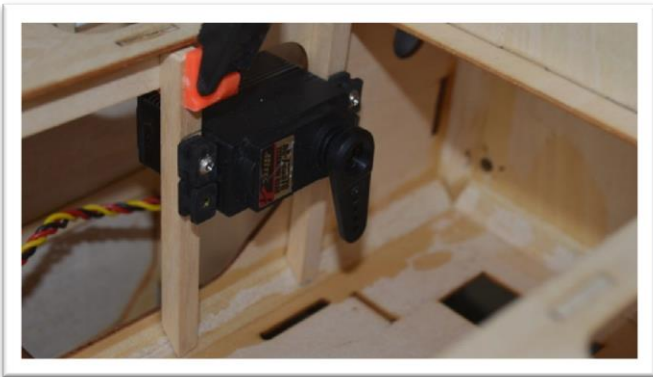

The engine ignition is typically mounted to the fuselage firewall, the side, or top of the engine box.

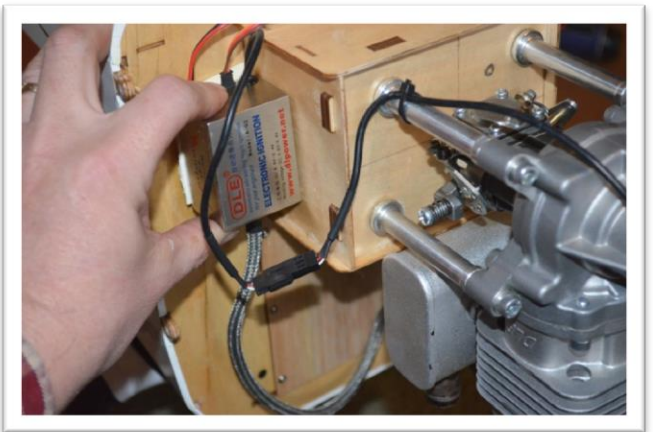


We suggest using a quality 16 oz (500cc) fuel tank and fuel line suited for gasoline such as Fourtitude, Dubro, or Sullivan. Begin assembly by bending the longest copper tube as a vent line. (Bend it a little at a time to prevent collapsing the tube.) Slide on the smaller stopper pressure plate with the tapped hole in it. Slide on the rubber stopper. Then slide on the larger pressure plate. Insert the 2 remaining copper tubes for a fill line and the carburetor supply line. Loosely add the machine screw to hold the assembly together. Slide the clunk (fuel pickup) onto the fuel line then slide the fuel line onto one of the copper tubes.



Insert the assembly into the fuel tank and check that the clunk is free to move around. Rotate the tank side to side and upside down to ensure the clunk does not get stuck. If cluck does not move freely in all positions trim a little off the fuel line and try it again. When you have established the correct length of the fuel line you can tighten the stopper screw.

The fuel tank vent line should loop up over the tank then exit through the bottom of the airplane. The fill line should be capped by a fuel dot. The carburetor supply line should run to a fuel line filter then through the firewall to the carburetor.


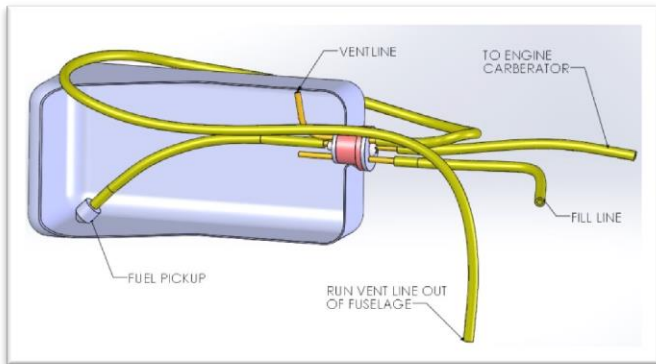


Position the fuel tank in front of the wing tube. Placing a piece of foam under the tank will prevent fuel foaming from vibration. Secure the tank using the hook and loop straps running through the slots on the plywood tray. We recommend using at least a 1" strap if you intend to do high G, 3D maneuvers.

Use the balsa sheet and 2mm screws to cover the exhaust tunnel if you do use canister style exhaust. The tunnel can be left open and the fuselage bottom venting can be installed to allow for additional engine cooling airflow.



If you plan on using canister style exhaust leave the exhaust tunnel open. Install the provided pipe mounts in the tunnel and fuselage venting.

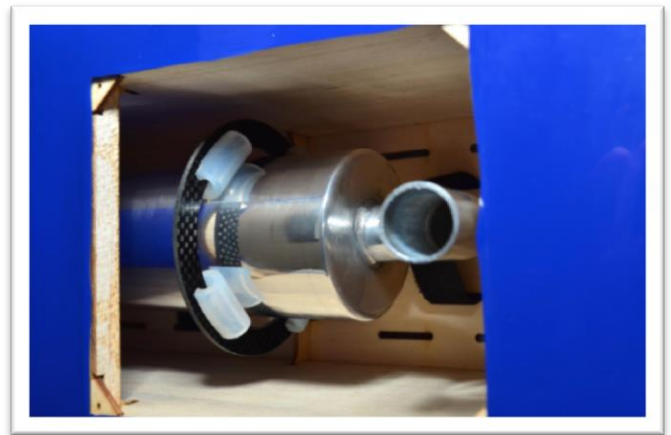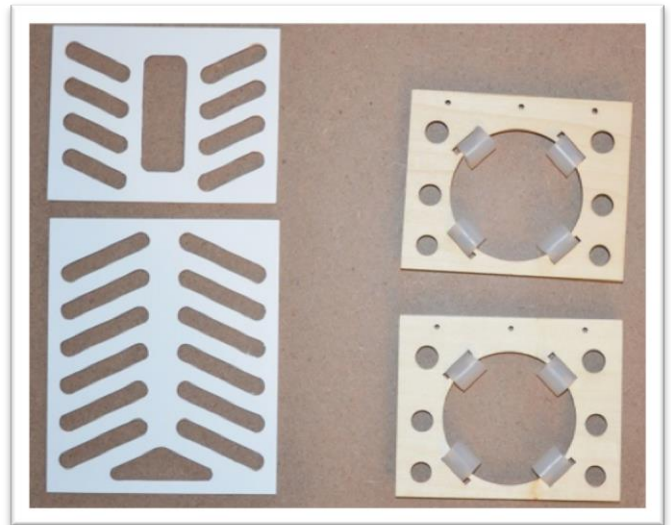

Cut the cowl as needed to clear the engine head, spark plug and muffler. Cut a large opening at the rear of the cowl to keep your engine running cool.



Cowl & Canopy

Use painters tape to transfer the mounting locations to the cowl. Apply painters tape over the mounting tabs. Push a pin through the tape and hole in the mounting tab.



Peel back the tape to uncover the mounting tabs and install the cowl. Tape the cowl into position. Use a pin to drill holes in the cowl through the locating holes you created in the tape. Rotate the pin as you push it through the cowl. (You can also use a pen to mark the hole locations on the cowl.)



Remove the cowl and use a 3/32" drill to open up the pin holes. (Or drill at the marked locations.)



Use 3mm wood screws to mount the cowl.




Apply thin CA glue to the mounting tabs and screw holes. (Allow plenty of time for the CA glue to dry before reinstalling the cowl.)




There are 6 blind nuts provided and 6 blind nuts used in this kit. Notice that there are 2 different sizes! Take the time to match up blind nuts to machines before proceeding to ensure you do not get them mixed up. Two blind nuts will be used on the canopy and 4 blind nuts will be used on the wheel pants.



Enlarge the hole in the canopy to receive the blind nuts.

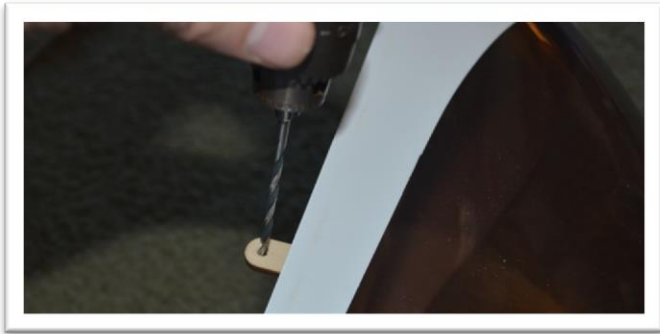

Use a washer and machine screw to draw the blind nut into the canopy tab.

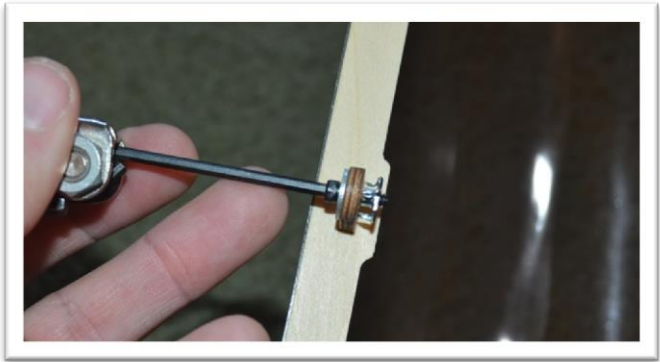

Secure the canopy to the fuselage.



Radio Installation & Setup

Take the time to properly balance and trim your aircraft.

Use the suggested throws below as your starting point then fine tune to your flying preferences after your first few flights.

Your receiver can be mounted anywhere in the airframe. Behind the wing tube works well on this fuselage. A piece of foam rubber should be used between the fuselage and the receiver to dampen any vibration.

Control Throws		
Low Rates		
Elevator	10-15 degrees	15-20% Expo
Aileron	15-20 degrees	40-45% Expo
Rudder	20 degrees	45-50% Expo
High Rates		
Elevator	45-50 degrees	60-65% Expo
Aileron	45+ degrees	65-75% Expo
Rudder	45+ degrees	75-85% Expo
Center of Gravity		
5.0 - 5.6" (127-143mm)		

The CG is measured back from the leading edge of wing 5.0 - 5.6" (127-143mm).

You can adjust your CG depending on your flying style.

If you fly aggressive 3D aerobatics you'll want to find a more of a neutral CG. When its flown level inverted it requires little to no elevator input to maintain altitude.

If you enjoy sport & precision aerobatics you'll want a slightly nose heavy CG.

To test the CG fly left or right at about 3/4 to full throttle and pull to a 45 degree up-line. Roll inverted and let go of the elevator stick. A correct nose heavy CG will slowly arc to the level. A neutral CG should nearly hold the up-line. And a tail heavy CG will steepen the up-line.

While the final setup is of personal preference, these are some general guidelines to make your first flight a success.

Enjoy your new plane!

We at AJ Aircraft sincerely hope you enjoy flying the 73" AJ Laser 230z.

Feel free to create a support ticket at aj-aircraft.com if you have any problems, questions, or suggestions. Once you get a few flights in, we would greatly appreciate your review submitted to our web site! See you at the field!

AJ Aircraft
2410 N Monroe St
Monroe, MI. 48162 USA
Phone: 734-244-4015



Guarantee

The KAVAN Europe s.r.o. products are covered by a guarantee which fulfils the currently valid legal requirements in your country. If you wish to make a claim under guarantee, please contact the retailer from whom you first purchased the equipment. The guarantee does not cover faults which were caused in the following ways: crashes, improper use, incorrect connection, reversed polarity, maintenance work carried out late, incorrectly or not at all, or by unauthorised personnel, use of other than genuine KAVAN Europe s.r.o. accessories, modifications or repairs which were not carried out by KAVAN Europe s.r.o. or an authorised KAVAN Europe s.r.o., accidental or deliberate damage, defects caused by normal wear and tear, operation outside the Specification, or in conjunction with equipment made by other manufacturers. Please be sure to read the appropriate information sheets in the product documentation!

Záruka

KAVAN Europe s.r.o. zaručuje, že tato stavebnice je v okamžiku prodeje prosta vad jak v materiálu, tak i v provedení. Tato záruka nekryje žádné části poškozené používáním nebo v důsledku jejich úpravy; v žádném případě nemůže odpovědnost výrobce a dovozce přesáhnout původní pořizovací cenu stavebnice. Firma KAVAN Europe s.r.o. si také vyhrazuje právo změnit nebo upravit tuto záruku bez předchozího upozornění. Stavebnice je předmětem průběžného vylepšování a zdokonalování - výrobce si vyhrazuje právo změny konstrukčního provedení bez předchozího upozornění.

Protože firma KAVAN Europe s.r.o. nemá žádnou kontrolu nad možným poškozením při přepravě, způsobem stavby a nebo materiály použitými modelářem při dokončování modelu, nemůže být předpokládána ani přijata žádná odpovědnost za škody spojené s používáním uživatelem sestaveného modelu. Okamžikem, kdy se uživatel rozhodne použít jím sestavený model, přejímá veškerou odpovědnost. Pokud není kupující připraven přijmout tuto odpovědnost, měl by stavebnici neprodeně vrátit v úplném a nepoužitém stavu na místě, kde ji zakoupil.

Tento záruční list opravňuje k provedení bezplatné záruční opravy výrobku dodávaného firmou KAVAN Europe s.r.o. ve lhůtě 24 měsíců. Záruka se nevztahuje na přirozené opotřebení v důsledku běžného provozu, protože jde o výrobek pro sportovně-modelářské použití, kdy jednotlivé díly pracují pod mnohem vyšším zatížením, než jakému jsou vystaveny běžné hračky. Pohyblivé díly modelu (motor, serva a jejich převody, atd.) podléhají přirozenému opotřebení a po čase může být nezbytná jejich výměna. Záruka se nevztahuje také na jakoukoliv část modelu, která byla nesprávně instalována, bylo s ní hrubě nebo nesprávně zacházeno, nebo byla poškozena při havárii.

Garantie

Die KAVAN Europe s.r.o. Produkte verfügen über eine Gewährleistung, die die Erfordernisse der gesetzlichen Regelungen in ihrem Land erfüllt. Falls Sie eine Beanstandung mit dem Anspruch auf Gewährleistung haben, kontaktieren Sie den Händler, bei dem Sie das Produkt gekauft haben. Die Gewährleistung deckt nicht Fehler ab, die durch Absturz, unsachgemäßer Gebrauch, unkorrekter Anschluss, Falschpolung, verspätete Wartung, Verwendung nicht originaler Zubehörteile, Veränderungen oder Reparaturen die nicht durch KAVAN Europe s.r.o. oder berechtigte Stellen, absichtliche Beschädigung, Verwendung außerhalb der zugelassenen Spezifikationen oder in Verbindung mit Produkten anderer Hersteller, entstanden sind.

Bitte lesen Sie vor Gebrauch die entsprechende Bedienungsanleitung sorgfältig durch!

Záruka

KAVAN Europe s.r.o. zaručuje, že táto stavebnica je v okamihu predaja prosta chýb ako v materiáli, ako aj v prevedení. Táto záruka nepokrýva žiadne časti poškodené používaním alebo v dôsledku ich úpravy; v žiadnom prípade nemôže zodpovednosť výrobcu a dovozcu presiahnuť pôvodnú obstarávaciu cenu stavebnice. Firma KAVAN Europe s.r.o. si tiež vyhradzuje právo zmeniť alebo upraviť túto záruku bez predchádzajúceho upozornenia. Stavebnice je predmetom priebežného vylepšovania a zdokonaľovania - výrobca si vyhradzuje právo zmeny konštrukčného prevedenia bez predchádzajúceho upozornenia.

Pretože firma KAVAN Europe s.r.o. nemá žiadnu kontrolu nad možným poškodením pri preprave, spôsobom stavby alebo materiálmi použitými modelárom pri dokončovaní modelu, nemôže sa predpokladať ani prijať žiadna zodpovednosť za škody spojené s používaním užívateľom zostaveného modelu. Okamihom, kedy sa užívateľ rozhodne použiť ním zostavený model, preberá všetku zodpovednosť. Pokiaľ nie je kupujúci pripravený prijať túto zodpovednosť, mal by stavebnicu bezodkladne vrátiť v úplnom a nepoužitom stave na mieste, kde ju zakúpil.

Tento záručný list opravňuje na vykonanie bezplatnej záručnej opravy výrobku dodávaného firmou KAVAN Europe s.r.o. v lehote 24 mesiacov. Záruka sa nevzťahuje na prirodzené opotrebenie v dôsledku bežnej prevádzky, pretože ide o výrobok pre športovo-modelárske použitie, kedy jednotlivé diely pracujú pod oveľa vyšším zaťažením, než akému sú vystavené bežné hračky. Záruka sa nevzťahuje tiež na akúkoľvek časť modelu, ktorá bola nesprávne inštalovaná, bolo s ňou hrubo alebo nesprávne zaobchádzané, alebo bola poškodená pri havárii.

Made in China

The logo for KAVAN, featuring the word "KAVAN" in a bold, stylized, black font. The letters are thick and blocky, with a slight shadow effect. A registered trademark symbol (®) is located to the right of the word.